



# RF Dual Color Remote Controller

09.283TC.04214



**Important:** Read All Instructions Prior to Installation

## Function introduction

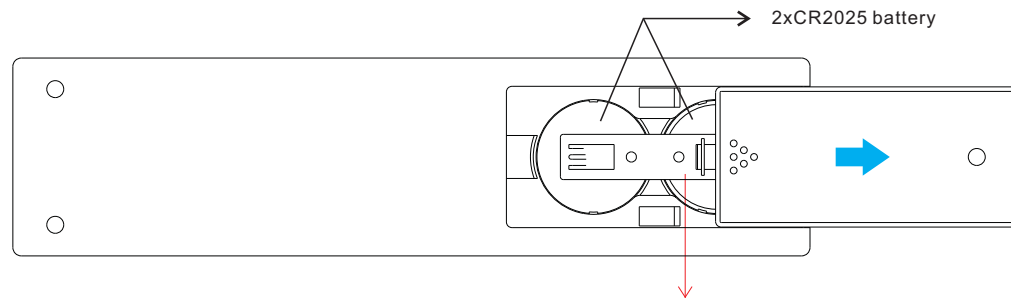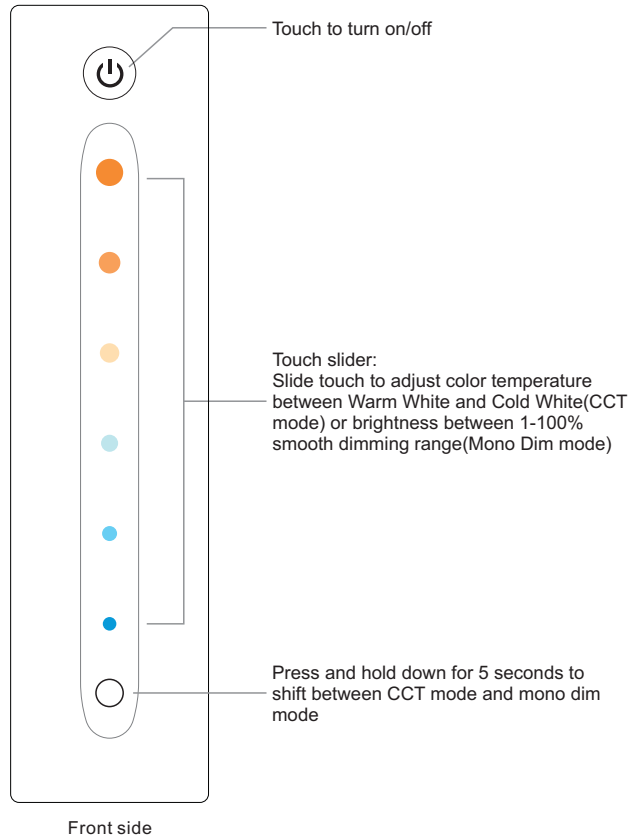

**Note:** Before the first use, please remove the protective film on the battery.

## Product Data

Output	RF signal
Operation Frequency	868/915/434MHz
Power Supply	6V(2xCR2025 battery)
Operating temperature	0-40°C
Relative humidity	8% to 80%
Dimensions	141x35x8.5mm

- Control 1 zone of RF receiver
- CCT color controller
- Compatible with universal serie RF receiver
- 1 receiver can be paired by max 8 different remote controls.
- Waterproof grade: IP20

## Safety & Warnings

- This device contains a button lithium battery that shall be stored and disposed properly.
- DO NOT expose the device to moisture.

## Operation

### 1. Pair with RF receivers:

Turn on the remote → Click “**Learning Key**” on RF receiver → Touch the slider → LED lights connected with the RF receiver will flicker once → The receiver is paired with the remote successfully.

### How to delete the pairing:

Press and hold down “**RF Code Key**” on the receiver for over 3 seconds until connected LED lights flicker twice, which means the pairing is deleted successfully.

**If you use multiple receivers, you can have all the receivers in the same zone**

