

# RF Dual Color Wall Mounted Controller

09.2836C.04219




**Important:** Read All Instructions Prior to Installation


## Function introduction

Rotate the knob counterclockwise:  
1. Decrease light intensity from 100% to 1%(brightness mode).  
2. Change color temperature from warm white to cold white(dual color mode)

Rotate the knob clockwise:  
1. Increase light intensity from 1% to 100%(brightness mode).  
2. Change color temperature from cold white to warm white(dual color mode)

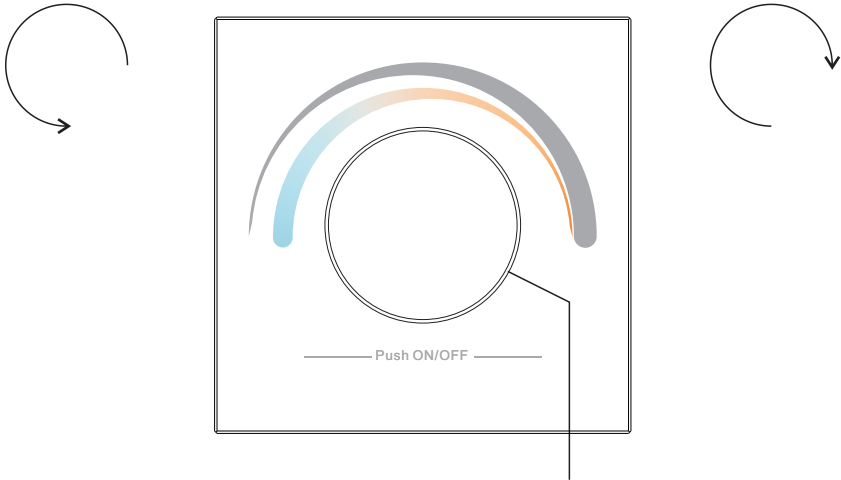

Click the knob to switch ON/OFF. Press and hold down to adjust brightness to 100%. Double click the knob to switch between dual color mode and brightness mode.

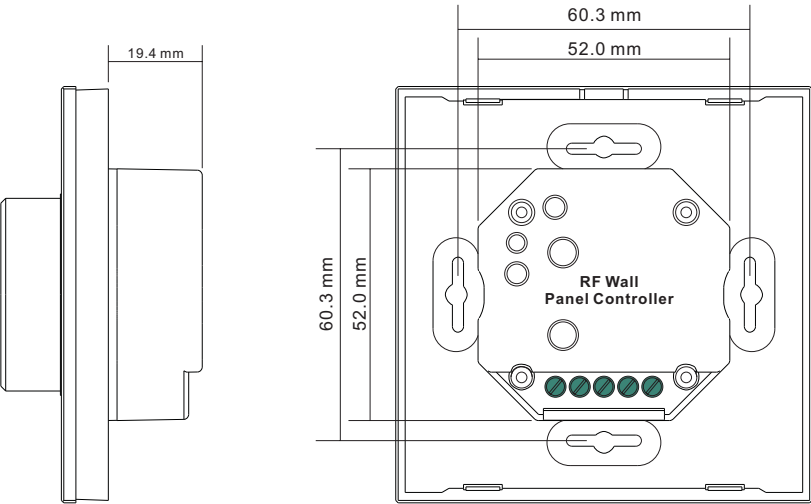

Back side

## Product Data

Output Signal	RF signal
Power Supply	3V(CR2032)
Power consumption	10 mA
Operating temperature	0-40°C
Relative humidity	8% to 80%
Dimensions	86x86x41.6mm

- Rotation sensitive
- Glass interface(white & black)
- Compatible with all universal series RF receivers
- Control CCT color
- Control 1 zone of RF receiver
- Waterproof grade: IP20

## Safety & Warnings

- DO NOT install with power applied to device.
- DO NOT expose the device to moisture.

## Operation

### Pair with RF receivers:

Click "Learning Key" on RF receiver → Rotate or click the knob → LED lights connected with the RF receiver will flicker once → The receiver is paired with the remote successfully.

### How to delete the pairing:

Press and hold down "Learning Key" on the receiver for over 3 seconds until connected LED lights flicker twice, which means the pairing is deleted successfully.

## Installation

