

WiFi Converter




09.288WT.04336

Important: Read All Instructions Prior to Installation

Function introduction

12-24VDC Power input

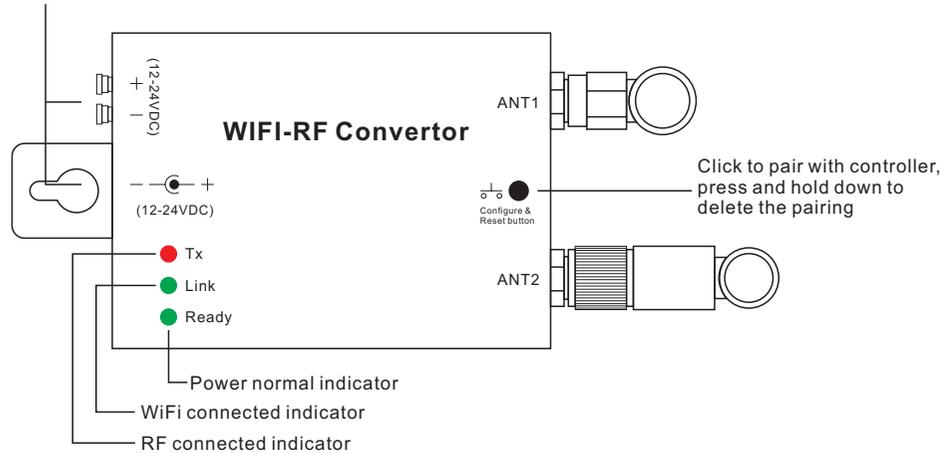

Product Data

Output	RF signal
Operation Frequency	2.4G
Power Supply	12-24VDC
Operating temperature	0-40°C
Relative humidity	8% to 80%
Dimensions	99x50x20mm

- The converter works with RF receiver series to be controlled by IOS or Android system via WIFI.
- Waterproof grade: IP20

Safety & Warnings

- DO NOT install with power applied to device.
- DO NOT expose the device to moisture.

Operation

1. Download application from 'app store' or 'google play' by searching 'easylighting' or scanning below two-dimension code.



Andriod



IOS

2. If the converter has connected with router, then connect your cell phone to your router network. If the converter did not connect with router, then connect your cell phone to the converter network directly. (Password:0123456789)

3. Open the easylighting application and operating according to the application manual.

Wiring diagram

